

DCF

22599-PB

CE

Ø225x99mm(Ø8.84"x3.89")



Volume Discount

11-99pcs : USD 35/Unit
Above 100pcs : USD 30/Unit


MOTOR	Outer rotor motor Ø92mm
IMPELLER	Plastic Impeller
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1.4 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

225mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF22599V24H-PB	24	4.17	100	2600	2.55	64.77	662	18.73	67
DCF22599V48H-PB	48	1.98	95	2700	2.55	64.77	665	18.81	67

DIMENSION

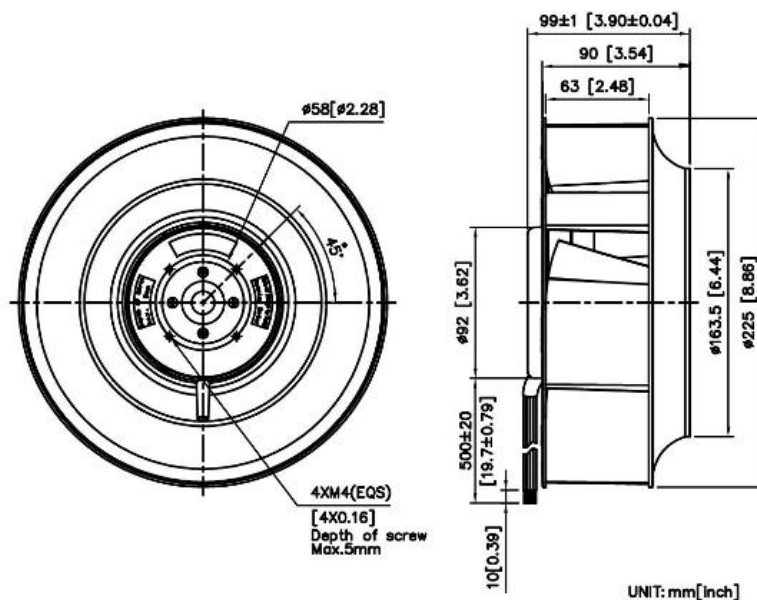

Wiring Diagram

Red — +VDC
Blue — GND
Yellow — 0–10V/PWM Speed Control
White — Tachometer (FG)

SYMBANG

AIR PERFORMANCE

