

DCF

404160-PB

Ø404x160mm(Ø15.91"x6.24")




MOTOR	Outer rotor motor Ø102mm
IMPELLER	Aluminum
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	4.9 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

404mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF404160V48H-PB	48	3.8	182.4	1300	2.0	50.3	1825.0	51.6	67

DIMENSION

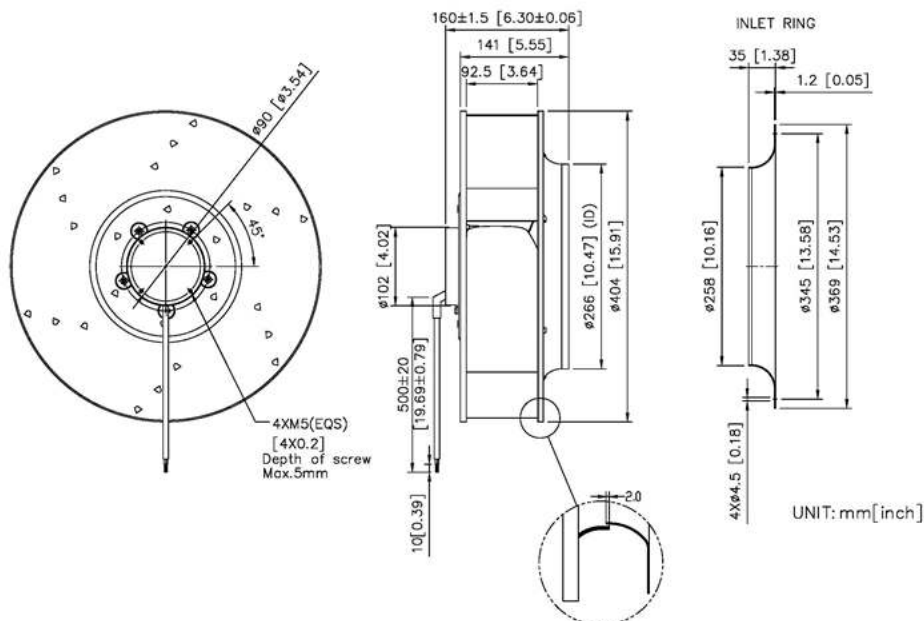

Wiring Diagram

Red — +VDC
Blue — GND
Yellow — 0-10V/PWM Speed Control
White — Tachometer (FG)

SYMBANG

AIR PERFORMANCE

