


DCB

351140



351x140x137mm(13.81"x5.51"x5.39")

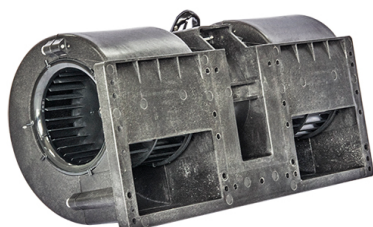


HOUSING	Plastic
IMPELLER	Plastic
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	2.5 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

351mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCB351140V24H	24	11.5	276	4050	2.9	73.7	618	17.5	71
DCB351140V12H	12	11.5	138	3000			442	12.5	65

DIMENSION

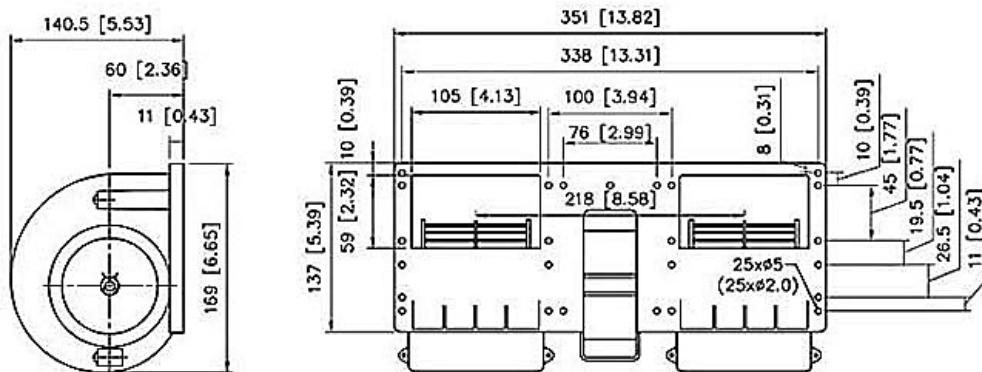

UNIT:mm[inch]

AIR PERFORMANCE

