


DCB

352108



352x108x101mm(13.85"x4.25"x3.97")

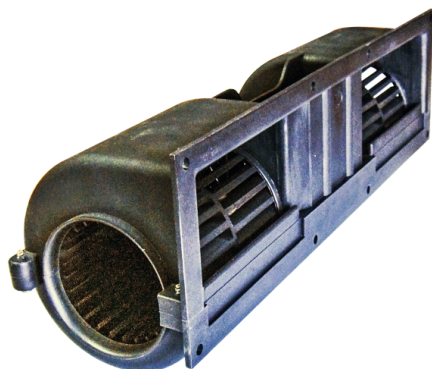

HOUSING	Plastic
IMPELLER	Plastic
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-20°C to + 40°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1.8 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


352mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCB352108V24H	24	6.5	156	3750			383	10.83	70
DCB352108V12H	12	8.4	100	3260			365	10.33	70

SYMBANG


DIMENSION

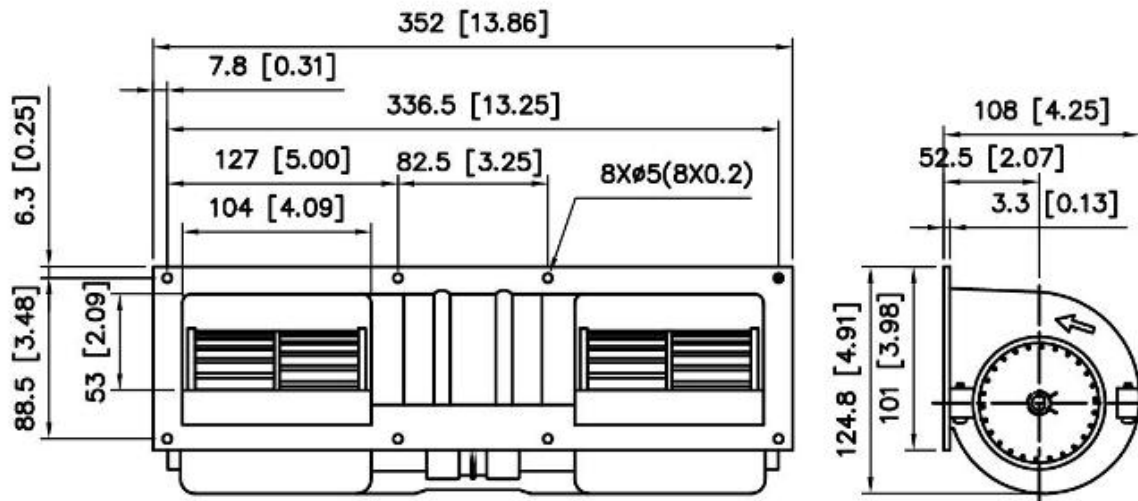


UNIT:mm[inch]

Wire Diagram


3Wire full Speed

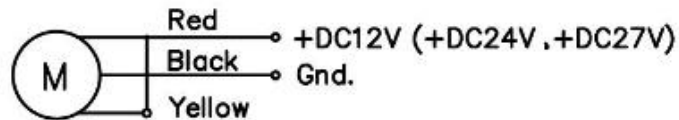

3Wire Variable Speed (A)

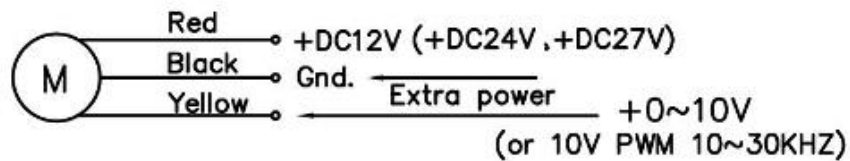

3Wire Variable Speed (B)

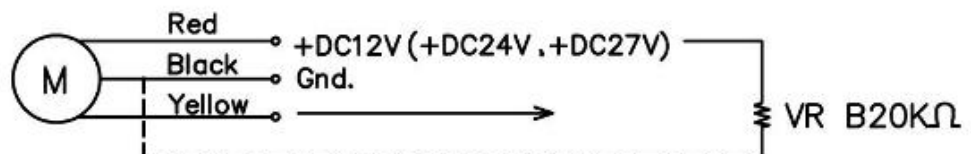

AIR PERFORMANCE

