


D

1504

CE

15x15x4mm(0.59"x0.59"x0.16")

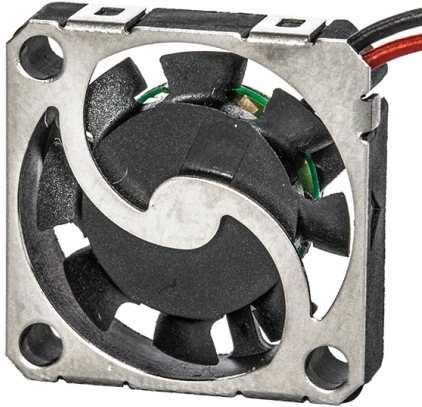

HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION RESISTANCE
WEIGHT
ROHS COMPLIANCE
APPLICATION

Liquid Crystalline Polymer, UL94V-0
Liquid Crystalline Polymer, UL94V-0
Sleeve
-10°C to + 60°C
5mA Max. at 500 VAC for 1 minute
10M Ω min. @500 VDC


1.5 g
Yes
Wearable dynamic air quality sampling applications,
auxiliary temperature control application,
and mini projector.
IP58 (Special IP Rating On Request)

IP LEVEL

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D1504V2.4HS	2.4	0.015	0.036	7500	0.03	0.69	0.12	0.003	14.6
D1504V3HS	3.3	0.020	0.066	10000	0.05	1.22	0.16	0.005	17.0
D1504V5HS	5.0	0.030	0.150	16000	0.12	2.96	0.28	0.008	23.7

DIMENSION

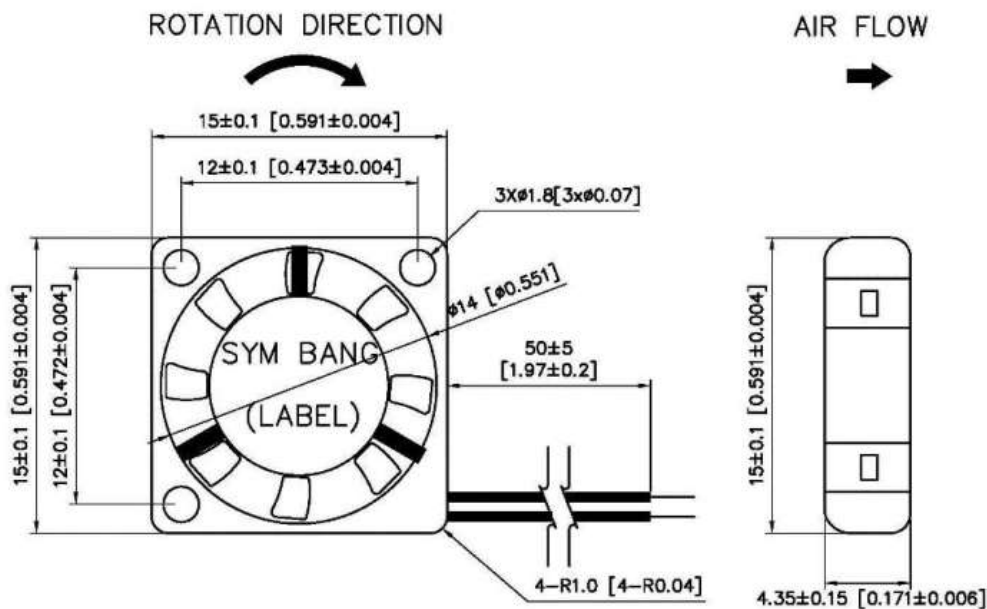

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

