

D

1708

CE

17x17x8mm(0.66"x0.66"x0.31")




|                       |                                                                                                                                                                                |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HOUSING               | Thermoplastic PBT+30% Fiber Glass, UL94V-0                                                                                                                                     |
| IMPELLER              | Thermoplastic PBT+30% Fiber Glass, UL94V-0                                                                                                                                     |
| BEARING               | Sleeve                                                                                                                                                                         |
| OPERATING TEMPERATURE | -10°C to + 60°C                                                                                                                                                                |
| DIELECTRIC STRENGTH   | 5mA Max. at 500 VAC for 1 minute                                                                                                                                               |
| INSULATION RESISTANCE | 10M $\Omega$ min. @500 VDC                                                                                                                                                     |
| WEIGHT                | 2.3 g                                                                                                                                                                          |
| ROHS COMPLIANCE       | Yes                                                                                                                                                                            |
| APPLICATION           | For pico projector, MID, UMPC,<br>smartbook, CCTV Portable GPS,<br>air delivery of portable gas/particular detector,<br>or to defrosting and ventilating of Mask/Goggle/Helmet |
| IP LEVEL              | IP57 included (Special IP Rating On Request)                                                                                                                                   |

## SPECIFICATION

| MODEL NO. | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE |       | MAX. AIR FLOW |        | NOISE dB(A) @1M |
|-----------|------------------|------------------|----------------|-------------|-------------------|-------|---------------|--------|-----------------|
|           |                  |                  |                |             | inchH2O           | mmH2O | CFM           | m3/min |                 |
| D1708V3HS | 3.3              | 0.055            | 0.181          | 12000       | 0.135             | 3.42  | 0.67          | 0.018  | 15              |
| D1708V5HS | 5                | 0.085            | 0.425          | 16000       | 0.27              | 6.86  | 0.95          | 0.026  | 18              |

## DIMENSION

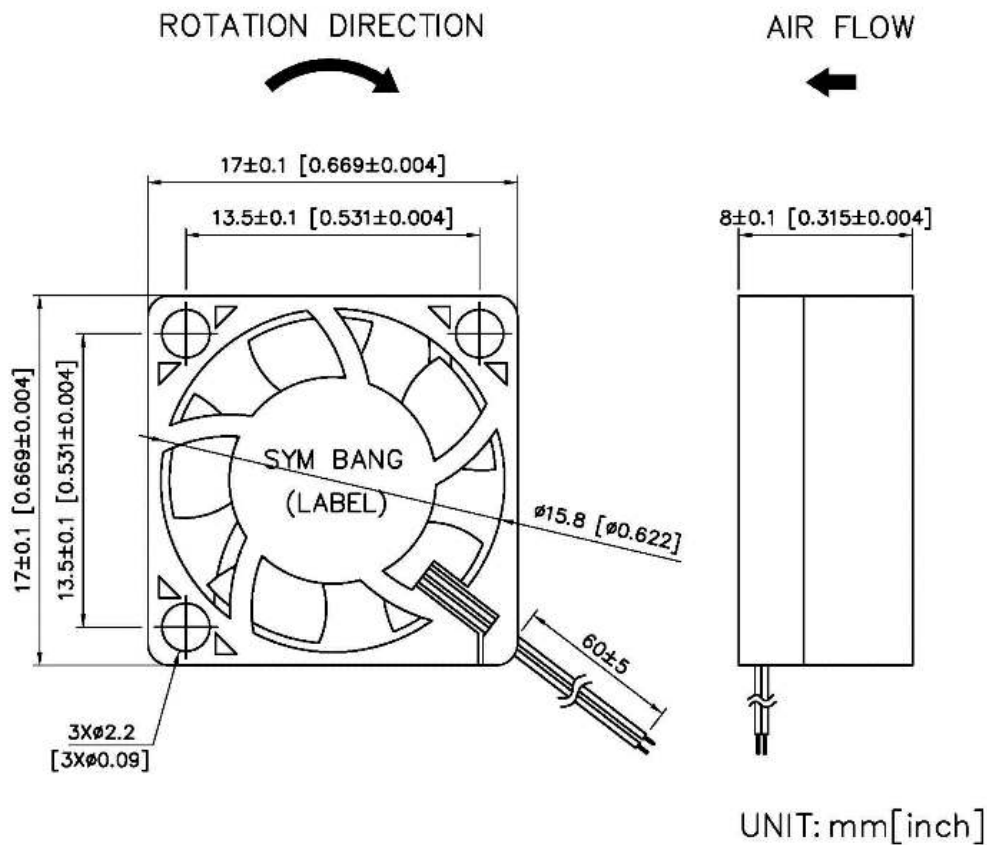

SYMBANG

## AIR PERFORMANCE

