

D

1804

CE

18x18x4mm(0.71"x0.71"x0.16")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	1.63 g
ROHS COMPLIANCE	Yes
APPLICATION	Mini Projector
IP LEVEL	IP57 (Special IP Rating On Request)

18mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D1804V3HS	3.3	0.041	0.135	9000	0.062	1.6	0.41	0.012	15.9
D1804V5HS	5.0	0.058	0.290	13000	0.132	3.3	0.58	0.016	24.9
D1804V5SLS	5.0	0.133	0.665	18000	0.225	5.7	1.02	0.029	32.0

DIMENSION

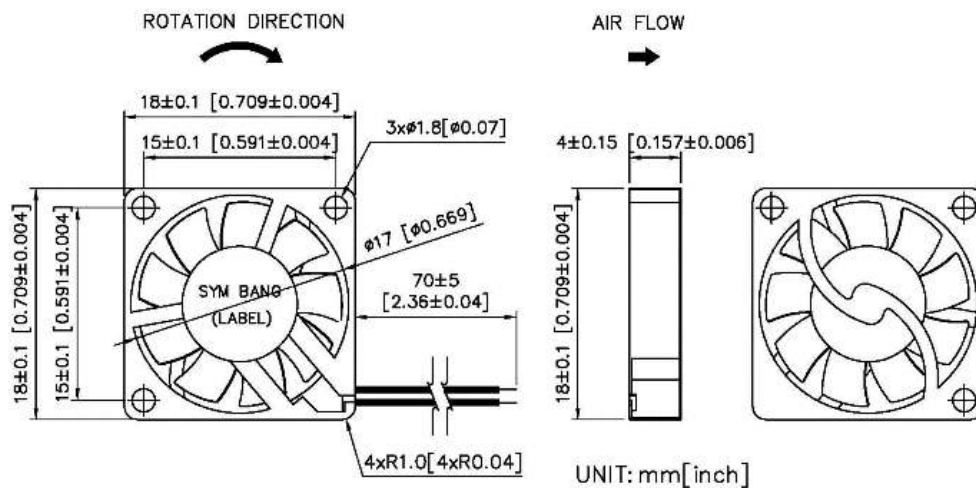

SYMBANG

AIR PERFORMANCE

