


D

4010-K

CE

40x40x10mm(1.57"x1.57"x0.39")

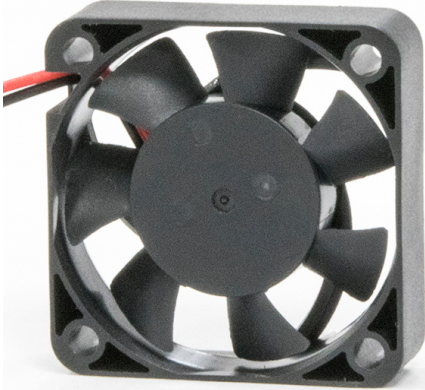


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	15 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

40 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D4010V5H-K	5	0.22	1.4	8000	0.21	5.10	9.25	0.26	35
D4010V5M-K	5	0.10	0.5	6000	0.12	2.92	7.24	0.21	26
D4010V5L-K	5	0.07	0.35	4000	0.06	1.42	4.75	0.13	21
D4010V12SL-K	12	0.18	2.16	10000	0.34	8.43	12.23	0.35	39
D4010V12H-K	12	0.11	1.32	8000	0.21	5.10	9.25	0.26	33
D4010V12M-K	12	0.08	0.96	6000	0.12	2.92	7.24	0.21	26
D4010V12L-K	12	0.07	0.84	4000	0.06	1.42	4.75	0.13	39
D4010V24SL-K	24	0.14	3.36	10000	0.34	8.34	12.23	0.35	39
D4010V24H-K	24	0.08	1.92	8000	0.21	5.10	9.25	0.26	33
D4010V5SL-K	5	0.29	1.45	10000	0.34	8.34	12.23	0.35	39
D4010V24L-K	24	0.04	0.96	4000	0.06	1.42	4.75	0.13	21
D4010V24M-K	24	0.06	1.44	6000	0.12	2.92	7.24	0.21	26

DIMENSION

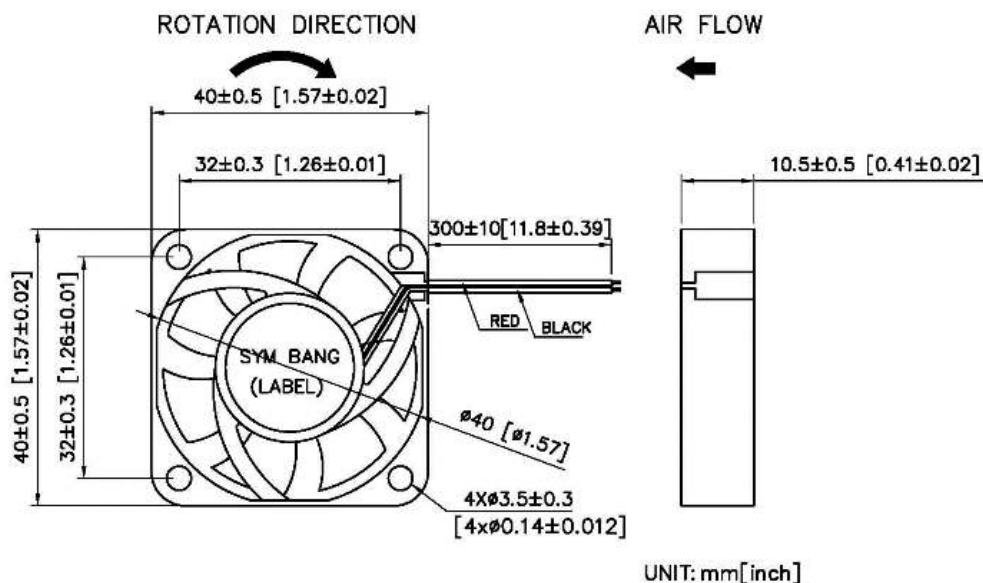

SYMBANG

AIR PERFORMANCE

