


DB 1804



18X18X4mm(0.71"X0.71"X0.16")

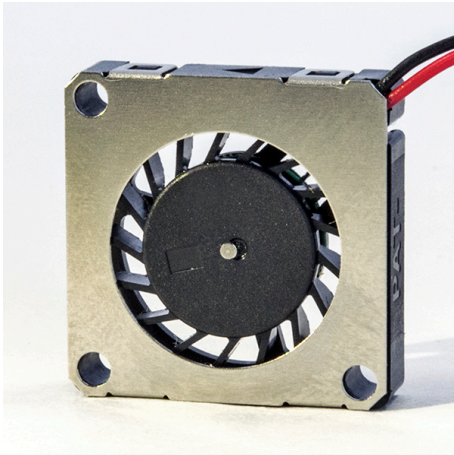


HOUSING	Liquid Crystalline Polymer, UL94V-0
IMPELLER	Liquid Crystalline Polymer, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	1.7 g
ROHS COMPLIANCE	Yes
APPLICATIONS	Video processing chipset, high-speed memory module, high-end smart phone, PDA, CCTV, mini projector, MID, smartbook and so on
IP LEVEL	IP21 (Special IP Rating On Request)

18mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DB1804V3HS	3.3	0.030	0.099	7000	0.096	2.44	0.14	0.003	25
DB1804V5HS	5	0.045	0.225	11000	0.203	5.16	0.20	0.0051	35

DIMENSION

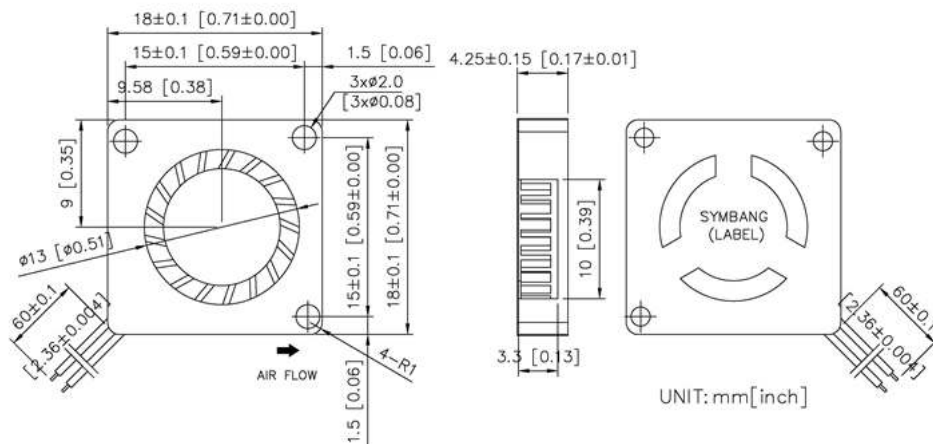

SYMBANG

AIR PERFORMANCE

