

DB 2608



26x20x8mm(1.02"x0.78"x0.31")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION RESISTANCE
WEIGHT
ROHS COMPLIANCE
APPLICATION


Thermoplastic PBT+30% Fiber Glass UL94V-0
Thermoplastic PBT+30% Fiber Glass UL94V-0
Sleeve
-10°C to + 60°C
5mA Max. at 500 VAC for 1 minute
10M Ω min. @500 VDC
3 g
Yes
For Pocket Projector, MID, UMPC, Smartbook,
CCTV, Portable GPS, Micro Fuel Cell, portable Gas
Particulate Detector, Potable Plasma Generator,
Mask/Goggle/Helmet/Ventilation and Defrosting
IP57 (Special IP Rating On Request)

IP LEVEL

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB2608V3SLS	3.3	0.098	0.323	8000	0.13	3.29	0.48	0.014	18.2
DB2608V3HS	3.3	0.045	0.148	6000	0.076	1.93	0.37	0.011	14.4
DB2608V5SLS	5	0.14	0.70	11000	0.247	6.3	0.65	0.018	21
DB2608V5HS	5	0.07	0.33	8000	0.13	3.29	0.48	0.014	18.2

DIMENSION

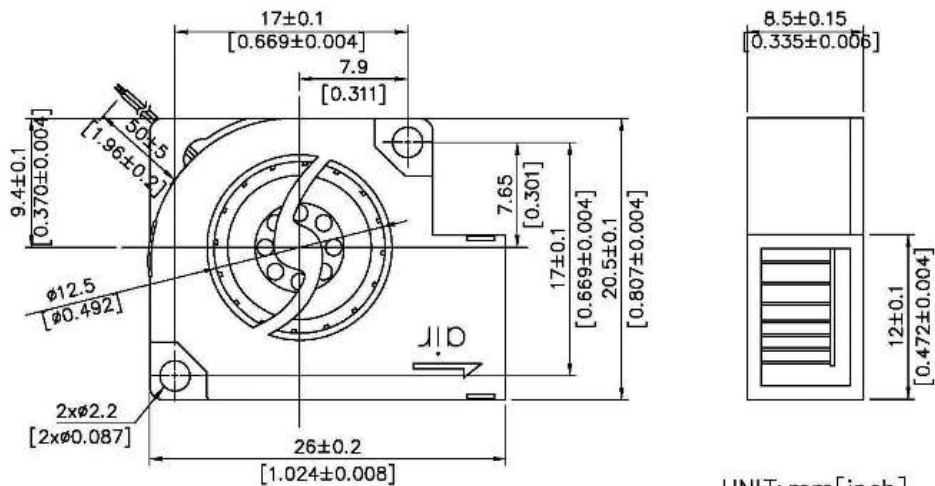

AIR PERFORMANCE

