


DF 90

CE

Ø90mm(Ø3.55")

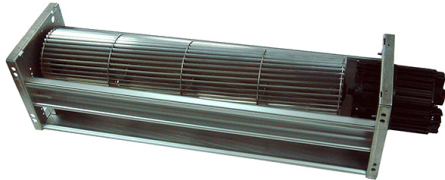


HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø90mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

90 mm


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DF90930V24H	24	6	144	1960	0.26	6.5	833	23.6	68
DF90680V24M	24	3	72	1660	0.22	5.5	706	20	60
DF90680V12H	12	6.5	78	1910	0.25	6.3	812	23	68

DIMENSION

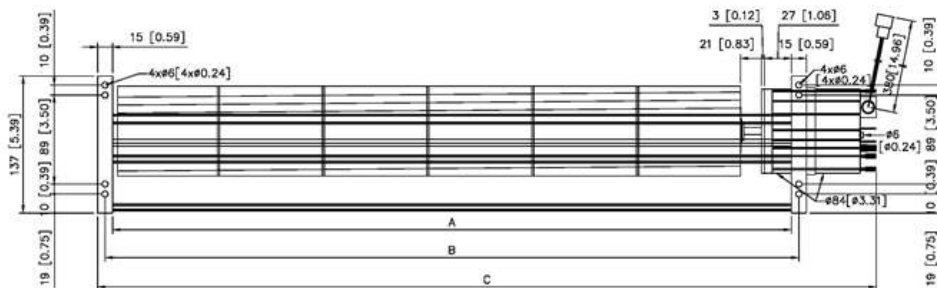

MODEL NO.	DIMENSION(mm)			WEIGHT (kg)
	A	B	C	
DF90930	930	960	1043	4.0
DF90680	680	710	793	4.0

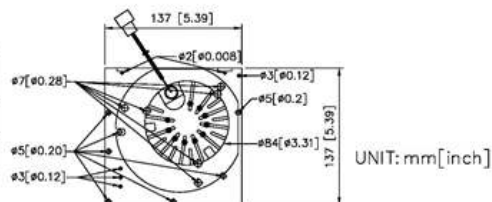

SYMBANG

AIR PERFORMANCE

