

DB 225245

CE

225x245x217mm(8.86"x9.65"x8.54")



HOUSING

Steel

IMPELLER

Steel

BEARING

Ball

OPERATING TEMPERATURE

0°C to + 40°C

DIELECTRIC STRENGTH

5mA Max. at 700 VDC for 1 second

INSULATION RESISTANCE

10M Ω min. @500 VDC

WEIGHT

3.2 kg

ROHS COMPLIANCE

Yes

IP LEVEL.


IP21 (Special IP Rating On Request)

225 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB225245V24HB	24	5.6	134.4	3550	3.07	78	247	6.99	74

DIMENSION

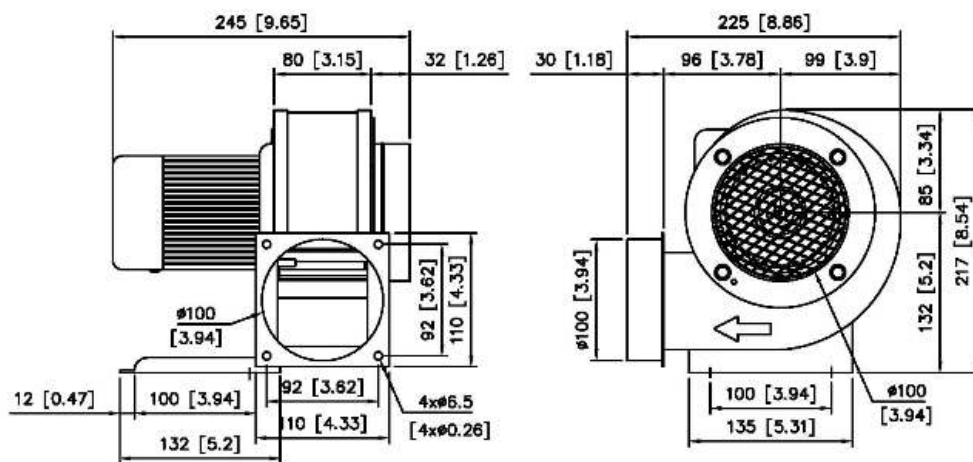

UNIT: mm[inch]

AIR PERFORMANCE

