

ACF

19070-HL

CE

Ø190mmx70mm(Ø7.5"x2.75")




MOTOR	Outer rotor motor Ø92mm
IMPELLER	Plastic
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 65°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
SAFETY	Thermally Protected
WEIGHT	1.2 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

190mm


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF19070V1HBL-HL	115	0.61	70	2700	1.52	38.7	368	10.42	54
ACF19070V2HBL-HL	230	0.26/0.34	55/72	2470/2570	1.10/1.34	28/34	335/353	9.48/9.98	54

DIMENSION

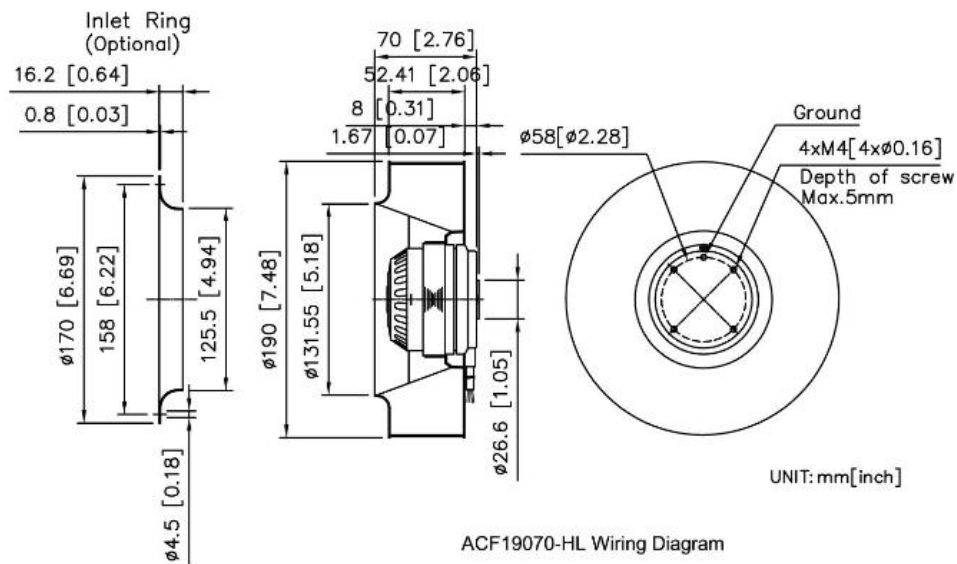

ACF19070-HL Wiring Diagram

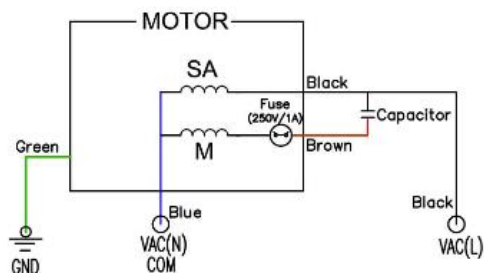

AIR PERFORMANCE

