

ACF

19072

CE

Ø190X72mm, 2 Poles(Ø7.48"X2.83")





MOTOR	Outer rotor motor Ø92mm
IMPELLER	Metal
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 65°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
SAFETY	Thermally Protected
WEIGHT	1.6 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

190mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF19072V1H2P	110	0.8	86	2385	1.77	44.48	336	9.52	61
ACF19072V2H2P	220	0.32/0.40	73/86	2410/2385	1.49/1.77	37.74/44.48	335/326	9.50/9.25	63/61


DIMENSION

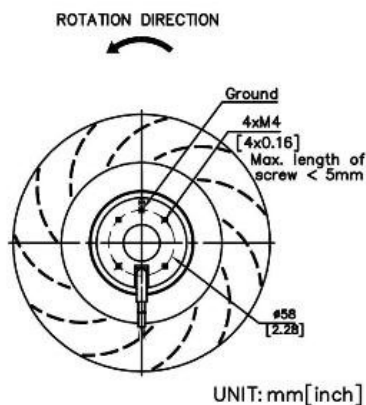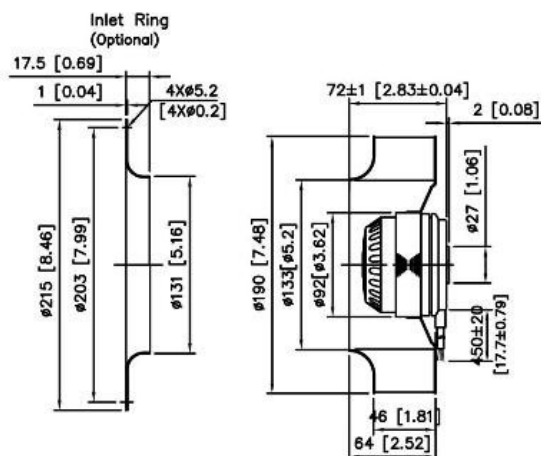

UNIT: mm[inch]

MODEL NO.	CAPACITOR uF/Vac
ACF19072V1H2P	8/250
ACF19072V2H2P	2/450

Wiring Diagram



M : Motor
C : Capacitor
Y/G : Yellow and Green

SYMBANG

AIR PERFORMANCE

