

ACF

22076-DA

CE

Ø220x76mm(Ø8.66"x2.99")




IMPELLER	Plastic
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	1,800 VAC for 1 second
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
WEIGHT	1.98 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

220mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF22076V1H2P-DA	115	0.70/1.00	82/115	2650/2950	1.58/2.17	40/55	490/550	13.87/15.57	75 / 78
ACF22076V2H2P-DA	230	0.35/0.50	82/115	2650/2950	1.58/2.17	40/55	490/550	13.87/15.57	75 / 78

DIMENSION

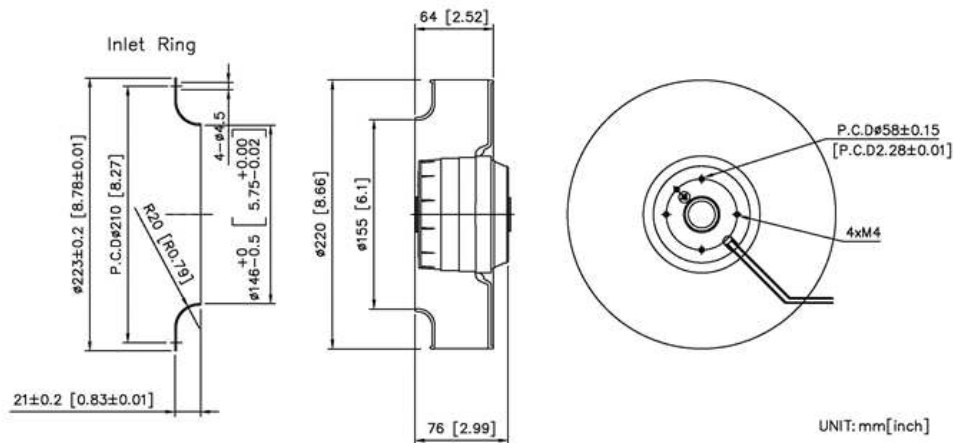

Wiring Diagram

MODEL NO.	CAPACITOR μ F/Vac
ACF22076V2H2P-DA	3 μ F/450V
ACF22076V1H2P-DA	10 μ F/250V



AIR PERFORMANCE

