

ACF

22575~10

CE

0

Ø225x75~100mm, 2 poles&4 poles(Ø8.86"x2.95"~3.94")



MOTOR
IMPELLER
BEARING
INSULATION
TERMINATION
OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION RESISTANCE
SAFETY
ROHS COMPLIANCE
IP LEVEL

Outer rotor motor Ø92mm
Metal
Ball
Class F
Lead Wire
0°C to + 65°C
5mA Max. at 1500 VAC for 1 second
10M Ω min. @500 VDC
Thermally Protected
Yes
IP44 (Special IP Rating On Request)


225mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF22575V1H2P	110	1.05	115	2925	2.37	60.18	512	14.5	72
ACF22575V2H2P	220	0.38/0.53	85/115	2650/2925	2.19/2.37	55.59/60.18	488/512	13.83/14.50	70/72
ACF225100V1H2P	110	1.9	200	2900	3.01	76.5	618	17.5	75
ACF225100V2H2P	220	0.65/0.92	140/200	2620/2870	2.45/3.01	62.22/76.50	576/617	16.33/17.50	71/75
ACF22575V1H4P	110	0.38	40	1700	0.86	21.73	324	9.17	58
ACF22575V2H4P	220	0.14/0.19	30/40	1440/1700	0.60/3.55	15.30/21.73	259/323	7.33/9.17	57/58
ACF225100V1H4P	110	0.52	55	1650	0.92	23.26	394	11.17	59
ACF225100V2H4P	220	0.25/0.26	50/55	1400/1650	0.62/0.92	15.81/23.26	347/394	9.83/11.17	55/59

DIMENSION

SYMBANG

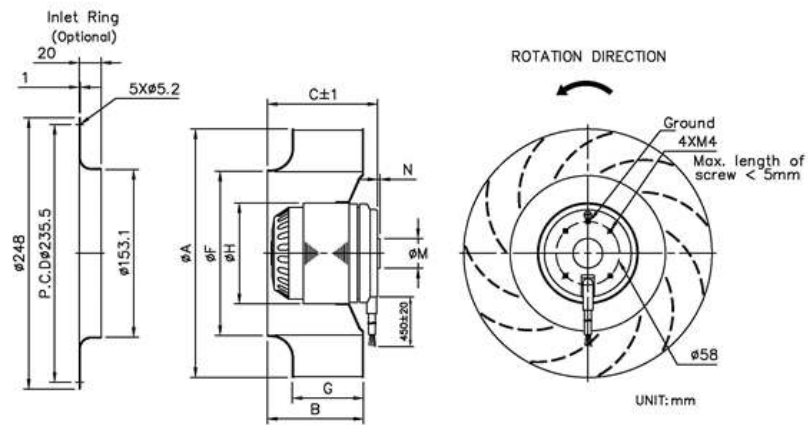

MODEL NO.	DIMENSION(mm)								WEIGHT (Kg)
	A	B	C	F	G	H	M	N	
ACF22575-2P	225	65	75	153	42	92	27	2	2.3
ACF22575-4P	225	65	75	153	42	92	27	2	3.0
ACF225100-2P	225	88	100	153	65	92	27	2	3.4
ACF225100-4P	225	88	100	153	65	92	27	2	3.2



AIR PERFORMANCE

