

ACF 25096 Ox96mm, 2 poles&4 poles(Ø9.84"x3.78")



MOTOR

IMPELLER BEARING INSULATION

TERMINATION

OPERATING TEMPERATURE DIFLECTRIC STRENGTH

INSULATION RESISTANCE SAFETY

WEIGHT

ROHS COMPLIANCE

IP LEVEL

Outer rotor motor Ø92mm

Metal Ball

Class F Lead Wire 0° C to $+ 65^{\circ}$ C

5mA Max. at 1500 VAC for 1 second

 $10M~\Omega$ min. @500 VDC

Thermally Protected


4kg

IP44 (Special IP Rating On Request)


SPECIFICATION

MODEL NO.	RATED	ΓED RATED	INPUT	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
	VOLTAGE(V)	CURRENT(A)	POWER(W)		inchH2O	mmH2O	CFM	m3/min	dB(A) @1M

DIMENSION

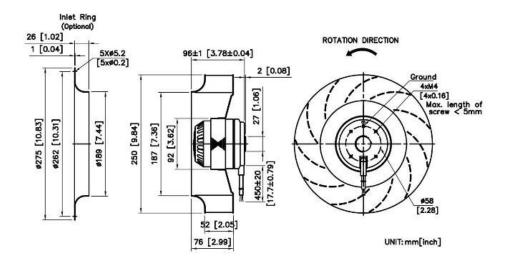

MODEL NO. CAPACITOR uF/Vac ACF25096V1H2P 30/250 ACF25096V2H2P 6/450 ACF25096V1H4P 8/250 ACF25096V2H4P 2/450



AIR PERFORMANCE

