

ACF

305110-HL



Ø305x110mm, 220v, 4 poles(Ø12.01"x4.33")





MOTOR	Outer rotor motor Ø102mm
IMPELLER	Plastic Impeller, Metal Plate
BEARING	Ball
INSULATION	Class A
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	7 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

305mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF305110V2H4PT-HL	3Ø 220	0.7	174	1390/1600	1.09	28	917	26	54

DIMENSION

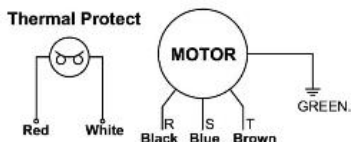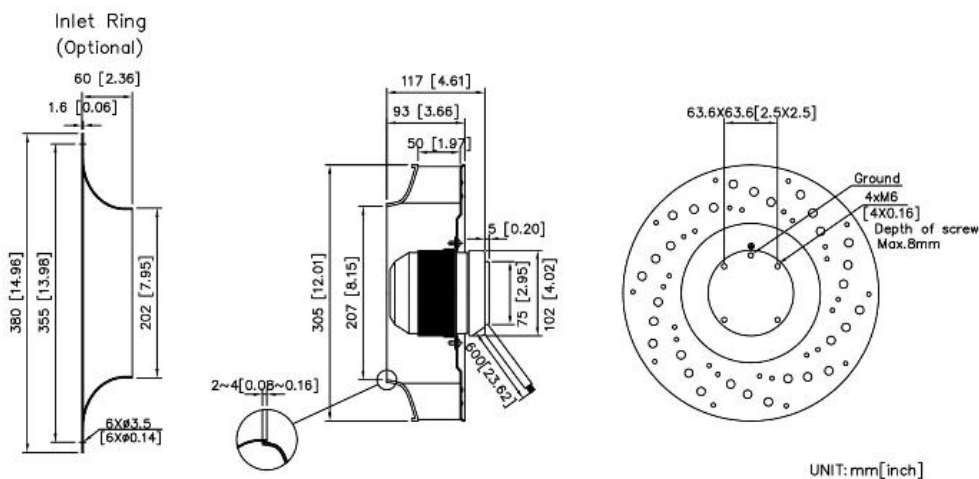

AIR PERFORMANCE

