

ACF

355128-HL



Ø355x128mm(Ø13.98"x5.04")




MOTOR	Outer rotor motor Ø102mm
IMPELLER	Aluminum Impeller
BEARING	Ball
INSULATION	Class A
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	4.2 Kg
ROHS COMPLIANCE	YES
CAPACITOR	4uF/450VAC
IP LEVEL	IP21 (Special IP Rating On Request)

355mm


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF355128V2H4PS-HL	220	0.91	185	1250	1.24	31.62	1130	32	54

DIMENSION

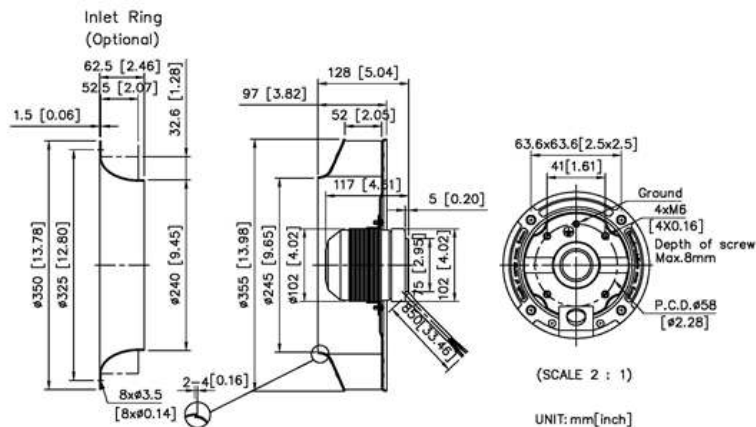

Wiring Diagram



AIR PERFORMANCE

