

ACB

238180

238x180mm, 2 poles&4 poles(9.37"x7.08")




MOTOR	Outer rotor motor Ø 92mm
HOUSING	Steel Painted Black Scroll
IMPELLER	Steel
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	0°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	4.2 Kg
ROHS COMPLIANCE	YES
IP LEVEL	IP44 (Special IP Rating On Request)

238mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACB238180V1H2P	110	1.52	165	1290	1.16	29.58	341	9.67	56
ACB238180V2H2P	220	0.69/0.76	150/165	1440/1290	1.12/1.16	28.56/29.58	359/341	10.17/9.67	59/56
ACB238180V2H4P	220	0.30/0.37	65/80	1170/1200	0.38/0.46	9.69/11.73	315/324	8.29/9.17	55/56

DIMENSION

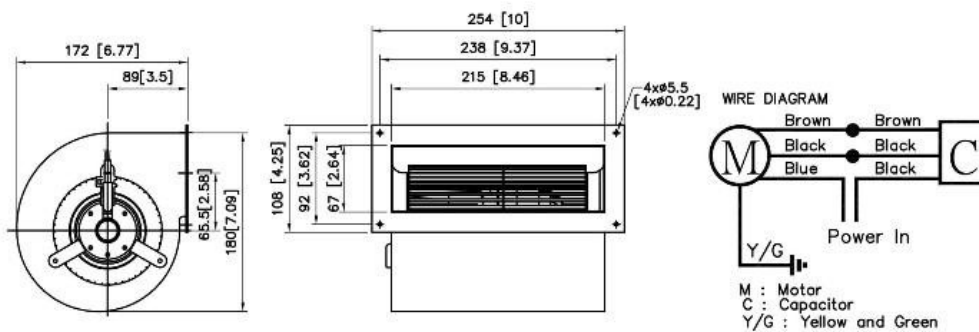

UNIT: mm[inch]

MODEL NO.	CAPACITOR uF/Vac
ACB238180V1H2P	20/250
ACB238180V2H2P	5/50
ACB238180V2H4P	2/450

AIR PERFORMANCE

