

ACB

243153-CK



243x232x153mm(9.56"x6.02"x6.02")




|                       |                                     |
|-----------------------|-------------------------------------|
| MOTOR                 | Outer rotor motor Ø 92mm            |
| HOUSING               | Aluminum                            |
| IMPELLER              | Plastic                             |
| BEARING               | Ball                                |
| INSULATION            | Class F                             |
| OPERATING TEMPERATURE | 0°C to + 65°C                       |
| DIELECTRIC STRENGTH   | 5mA Max. at 1500 VAC for 1 second   |
| INSULATION RESISTANCE | 10M Ω min. @500 VDC                 |
| SAFETY                | Thermally Protected                 |
| WEIGHT                | 6.5 Kg                              |
| ROHS COMPLIANCE       | YES                                 |
| IP LEVEL              | IP21 (Special IP Rating On Request) |

243mm

## SPECIFICATION

| MODEL NO.        | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE |       | MAX. AIR FLOW |        | NOISE dB(A) @1M |
|------------------|------------------|------------------|----------------|-------------|-------------------|-------|---------------|--------|-----------------|
|                  |                  |                  |                |             | inchH2O           | mmH2O | CFM           | m3/min |                 |
| ACB243153V1HB-CK | 110/120          | 3.62             | 380            | 1800/3200   | 2.32              | 59    | 576           | 16.3   | 68              |
| ACB243153V2HB-CK | 220/230          | 1.2              | 260            | 1600/2300   | 1.61              | 41    | 550           | 15.57  | 68              |

## DIMENSION

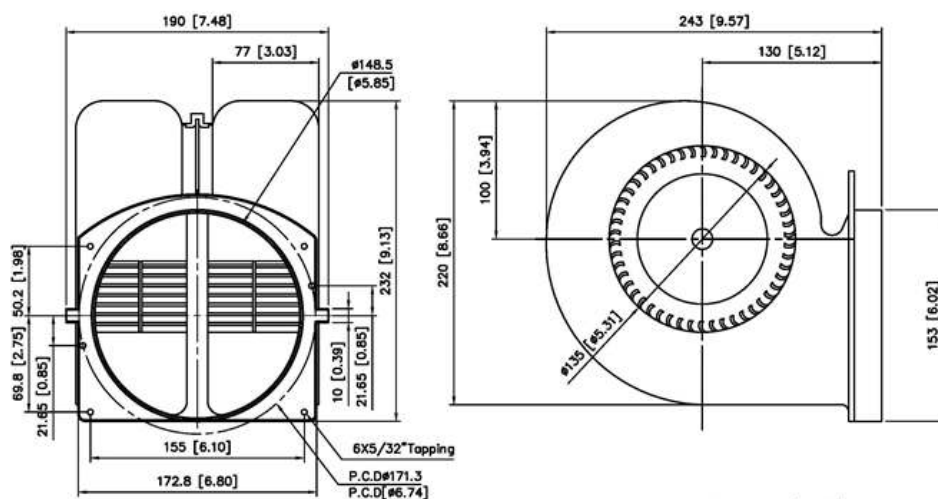

## AIR PERFORMANCE

