

ECF

19095-YH



Ø190x95mm(Ø7.48"x3.74")




MOTOR	Outer rotor motor Ø92mm
IMPELLER	Plastic PA 7
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1.3 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

190mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF19095V2HB-YH	220		90	3000	1.83	46.53	358.14	10.14	71.4
ECF19095V1HB-YH	110		90	3000	1.83	46.53	358.14	10.14	71.4

DIMENSION

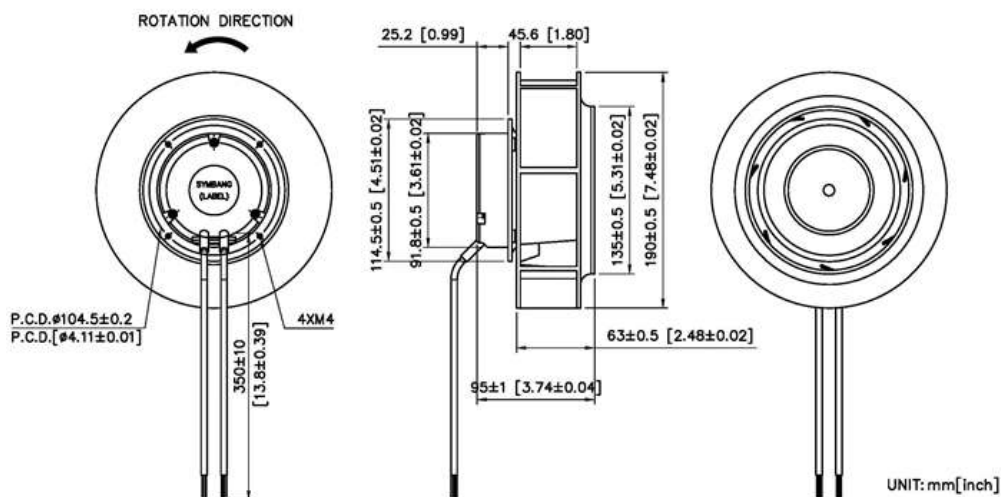

AIR PERFORMANCE

