

ECF

316194

CE
Ø316x194mm(Ø12.52"x7.64")

MOTOR	Outer rotor motor Ø102mm
IMPELLER	Aluminum
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	3.38 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


316mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF316194V2HB	230	2.60	390	2350	3.42	86.79	1802.6	51.04	75
ECF316194V2SLB	230	3.50	530	2600	4.06	103.08	1971.8	55.82	82
ECF316194V1HB	115	4.20	390	2350	3.42	86.79	1802.6	51.04	75
ECF316194V2MB	230	0.95	140	1600	1.88	47.7	1288.7	36.49	57
ECF316194V1MB	115	1.80	140	1600	1.88	47.7	1288.7	36.49	57

DIMENSION

SYMBANG

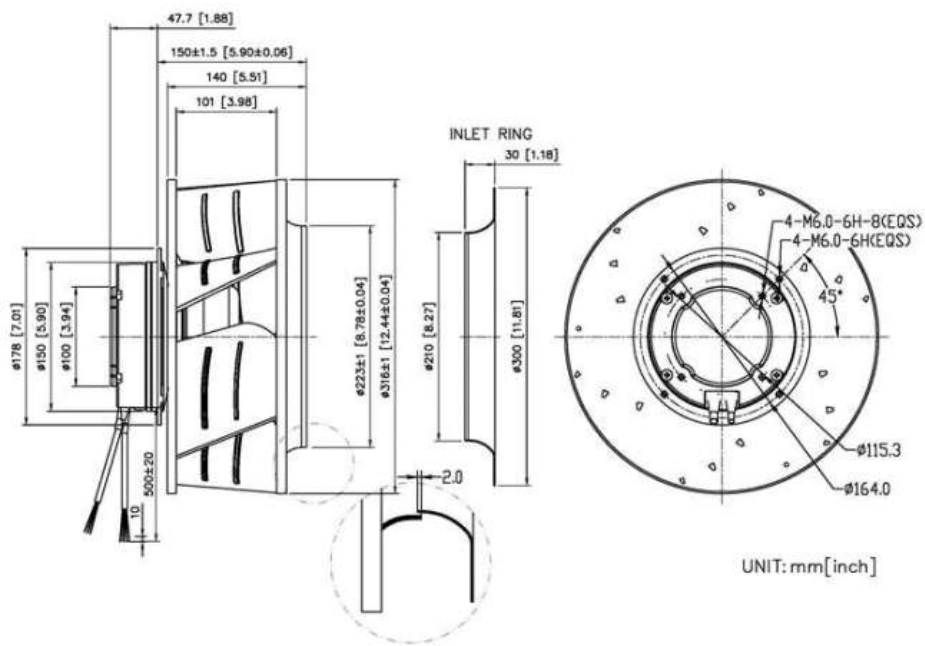

AIR PERFORMANCE

