

ECF

404206

Ø404x206mm(Ø15.91"x8.11")




MOTOR	Outer rotor motor Ø102mm
IMPELLER	Aluminum
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	7.7 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

404mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
ECF404206V2HB	230	2.5	360	1550	2.8	71	2100	59.47	71

DIMENSION

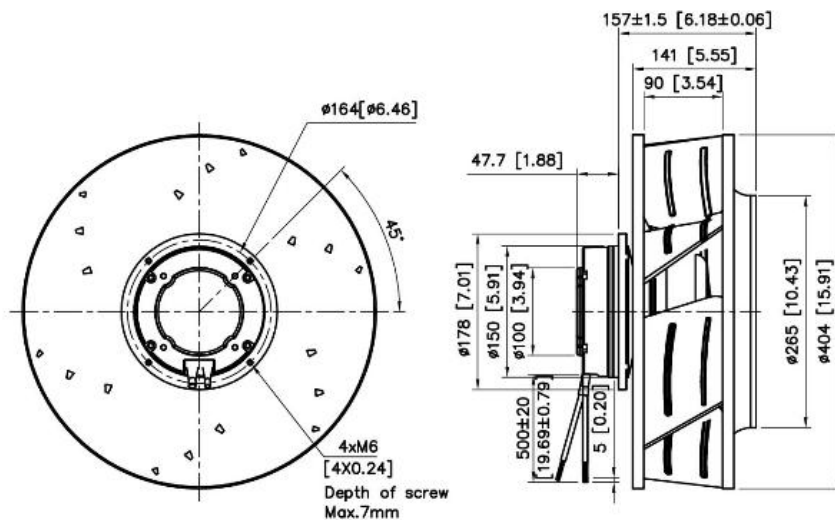

Wiring Diagram

DC

Red---10VDC Output Max 1.1mA
Blue---GND
Yellow---0-10V/PWM Speed Control
White---FG, Open Collector

AC

Brown---L
Blue---N
Green/Yellow---PE

SYMBANG

AIR PERFORMANCE

