

DTF

100303D



Ø100mmx303mm(Ø3.9"x11.8")




HOUSING	Engineer PP Plastic
IMPELLER	Axial Flow Type, ABS Plastic
BEARING	Ball
MOTOR TYPE	Single Phase Ball Bearing Motor
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	100 VAC ~ 125 VAC for 115V Type 200 VAC ~ 245 VAC for 230V Type
DIELECTRIC STRENGTH	1500 VAC for 1 second
INSULATION	Class B
INSULATION RESISTANCE	10M Ohms min. @500VDC
OPERATING TEMPERATURE	-20°C to + 60°C
SAFETY	Thermally Protected
WEIGHT	2000 g
ROHS COMPLIANCE	Yes

100mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
-	230	0.11	23	1850	0.52	13.3	97.1	2.7	26
DTF100303V1D	115	0.26	30	2200	0.62	15.9	116	3.3	31
DTF100303V2D	230	0.12	26	2200	0.62	15.9	116	3.3	31
-	115	0.24	28	1850	0.52	13.3	97.1	2.7	26

DIMENSION

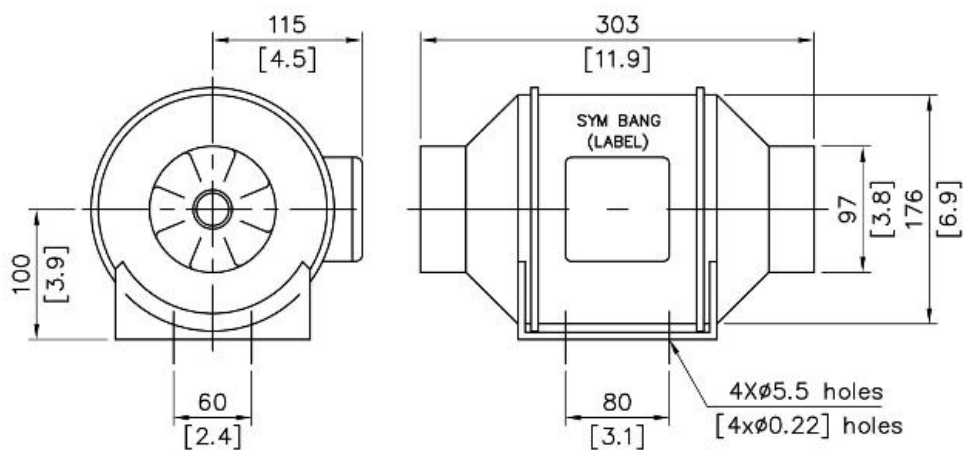

UNIT: mm[inch]

AIR PERFORMANCE

