

DTF

150165

Ø150mmx172mmx165mm(Ø5.9"x5.77"x6.4")



HOUSING	Plastic dust, Aluminum Die Casting of the fan
IMPELLER	Metal
BEARING	Ball
MOTOR TYPE	Outer Rotor, Shaded Pole Motor
TERMINATION	Terminal or Lead Wire
OPERATING VOLTAGE RANGE	85 VAC ~ 125 VAC for 115V Type 185 VAC ~ 245 VAC for 230V Type
DIELECTRIC STRENGTH	1500 VAC for 1 second
INSULATION	Class F
INSULATION RESISTANCE	10M Ohms min. @ 500VDC
OPERATING TEMPERATURE	-10°C to +70°C
SAFETY	Thermally Protected
WEIGHT	1,320 g
ROHS COMPLIANCE	YES
IP LEVEL	IP21 (Special IP Rating On Request)


150

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DTF150165V2MS	230	0.25/0.23	42/42	2800/3250	0.55/0.63	14/16	195/230	5.5/6.5	49/53

DIMENSION

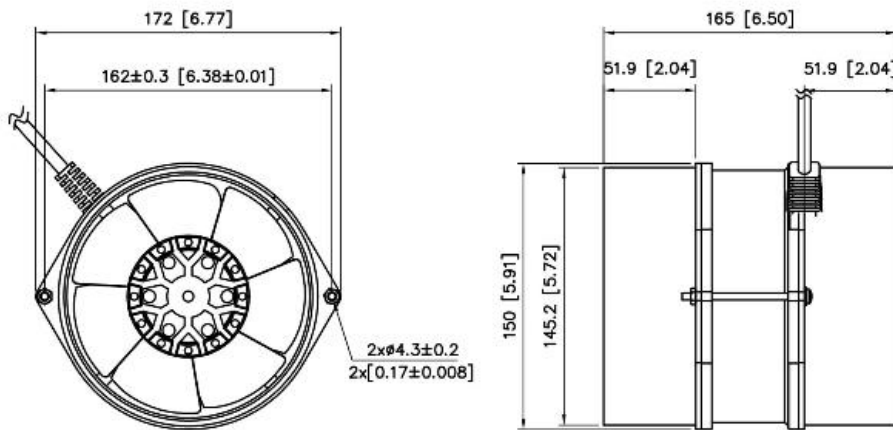

UNIT:mm[inch]

AIR PERFORMANCE

