

AFC 60



Ø60mm(Ø2.36")





HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	0°C to + 45°C
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
MOTOR TYPE	Capacitor Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AFC60306V1H	120	0.33	39	2900	0.31	7.8	205	5.8	55
AFC60306V2H	230	0.15	31	2600	0.20	5.0	183	5.2	50
AFC60368V1H	120	0.35	42	2600	0.26	6.7	240	6.8	54
AFC60368V2H	230	0.16	34	2500	0.21	5.3	223	6.3	53
AFC60429V1H	120	0.39	47	2600	0.23	5.9	267	7.5	54
AFC60429V2H	230	0.17	36	2500	0.17	4.4	252	7.1	53

DIMENSION

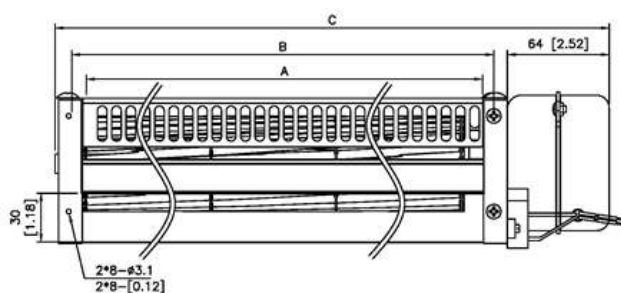

UNIT:mm[inch]

MODEL NO.	DIMENSION			WEIGHT (g)
	A	B	C	
AFC60306	306	321	405	1800
AFC60368	368	383	467	1850
AFC60429	429	444	528	1930

AIR PERFORMANCE

