

AFC 60G

CE
Ø60mm(Ø2.36")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	0°C to + 45°C
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type
	185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
MOTOR TYPE	Capacitor Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AFC60426DVHG	110	0.42/0.56	45/62	2600/2800	0.24/0.28	6/7.2	300/354	8.5/10	55/57
AFC60426DVHG	230	0.22	49	2700	0.26	6.5	318	9	56
AFC60426V2LG	230	0.11	26	1700	0.06	1.5	177	5	34
AFC60606DVHG	110	0.67	73	2000	0.24	6.0	354	10	51
AFC60606DVHG	230	0.28	64	2300	0.20	5.0	424	12	54
AFC60606V2LG	230	0.11	26	1400	0.06	1.5	283	8	37
AFC60426DVHG	220	0.22/0.29	47/64	2600/2800	0.24/0.28	6/7.2	300/354	8.5/10	55/57

DIMENSION

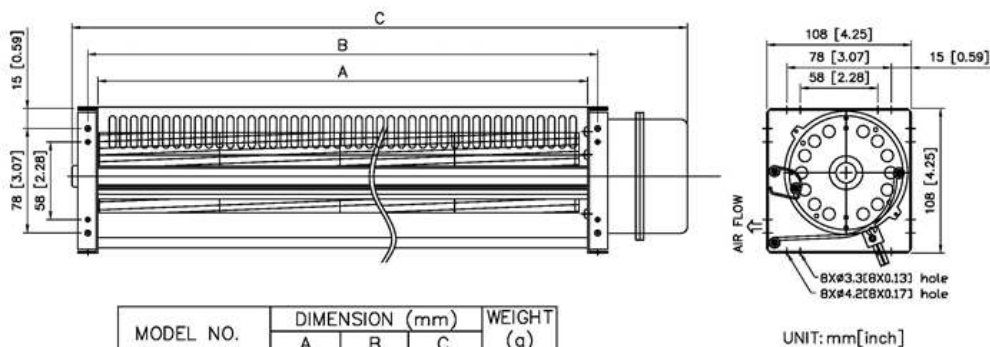

MODEL NO.	DIMENSION (mm)			WEIGHT (g)
	A	B	C	
AFC60426DVHG	426	441	555	2850
AFC60426V2LG	426	441	520	2800
AFC60606DVHG	606	621	735	3300
AFC60606V2LG	606	621	700	3200

SYMBANG

