

A

17251-7DA

CE

172x151x51mm(6.8"x5.9"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION	Class F
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	1040 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251V1SHB-7DA	115	0.41/0.35	41/40	2800/3300	0.60/0.77	15.2/19.6	255/300	7.22/8.49	55/61
A17251V2SHB-7DA	230	0.19/0.17	39/40	2800/3300	0.60/0.77	15.2/19.6	255/300	7.22/8.49	55/61

DIMENSION

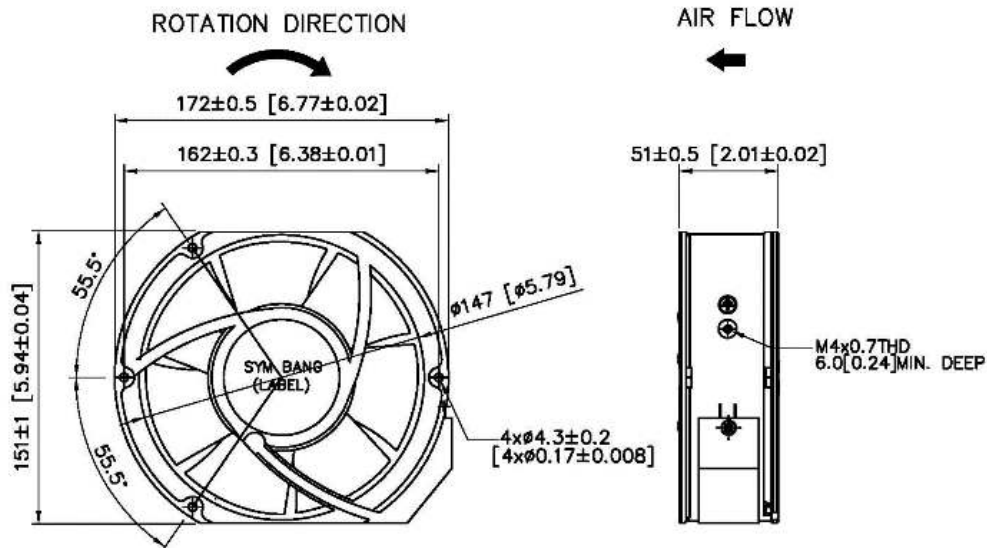

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

