

AF

600150-B

CE

Ø600x150mm(Ø23.62"x5.91")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 105°C
INSULATION	Class F
OPERATING VOLTAGE RANGE	220 VAC/240 VAC 380 VAC/420 VAC
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Impedance Protected
TERMINATION	Lead Wire
WEIGHT	14 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


600

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AF600150V2L6PS-B	220/240	2.4	520	900/950			4825/5237	136.55/148.21	70/78
AF600150V3L6PT-B	380/420	1.4	520	900/950			4825/5237	136.55/148.21	70/78
AF600150V3M4PT-B	380/420	1.6	820	1300/1400			4925/5437	139.38/153.87	73/80

DIMENSION

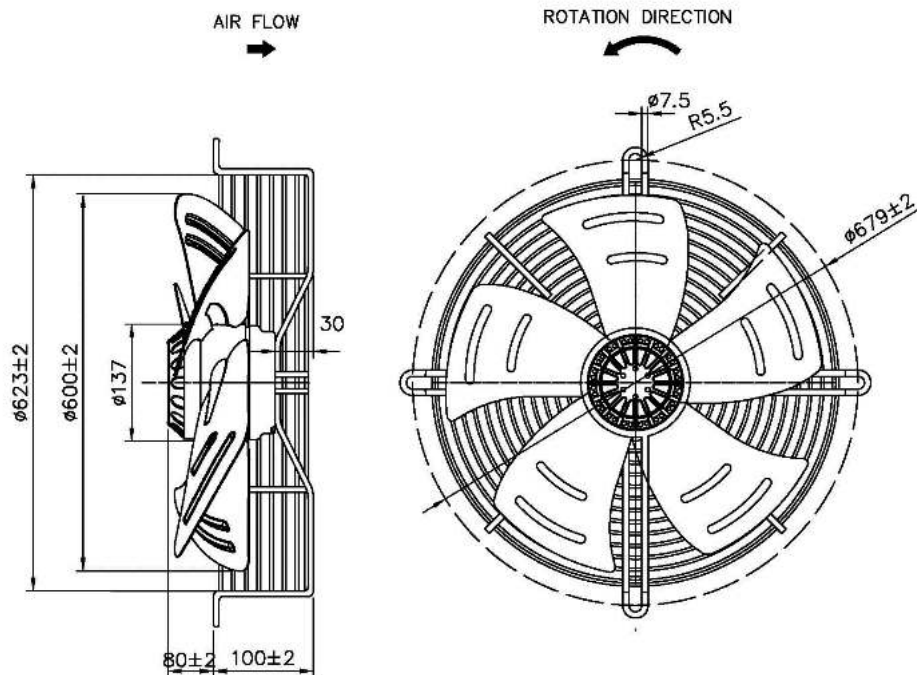

UNIT: mm

SYMBANG

AIR PERFORMANCE

