

# ECB

# 270209-PB



270x209mm(10.6"x8.2")



MOTOR  
HOUSING  
IMPELLER  
BEARING  
INSULATION  
OPERATING TEMPERATURE  
INSULATION RESISTANCE  
DIELECTRIC STRENGTH  
WEIGHT  
ROHS COMPLIANCE  
IP LEVEL

EC external rotor motor  
Galvanized Metal Steel  
Galvanized Metal Steel  
Ball  
Class B  
-25°C to + 60°C  
50M  $\Omega$  min. @1000 VDC  
10mA maximum at 1500VAC 50Hz five second  
4.1 Kgs  
Yes  
IP44



# 270

mm

## SPECIFICATION

| MODEL NO.        | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE |       | MAX. AIR FLOW |        | NOISE dB(A) @1M |
|------------------|------------------|------------------|----------------|-------------|-------------------|-------|---------------|--------|-----------------|
|                  |                  |                  |                |             | inchH2O           | mmH2O | CFM           | m3/min |                 |
| ECB270209V2HB-PB | 230              | 1.2              | 170            | 1500        | 3.39              | 86.16 | 671           | 19     | 68              |

## DIMENSION

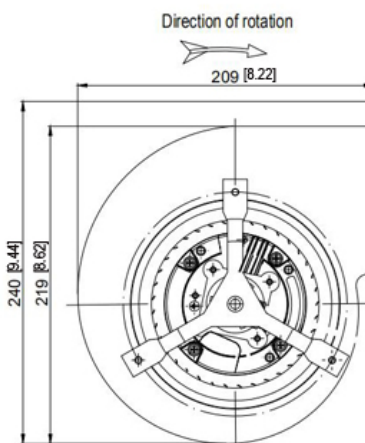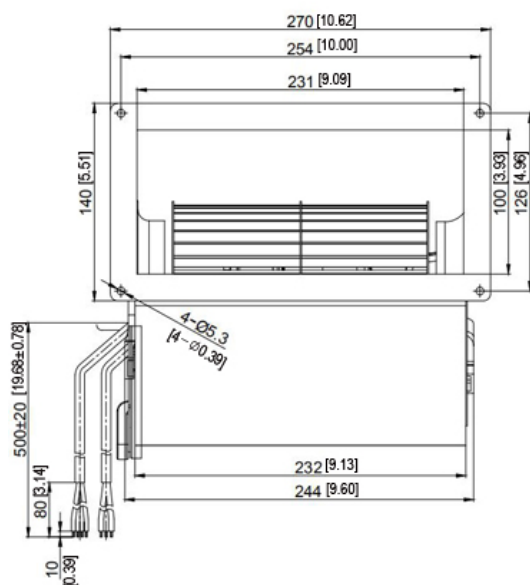

UNIT : mm [inch]

SYMBANG

## AIR PERFORMANCE

